# UEFI is not your enemy

#### Leif Lindholm

Debian Miniconf-UK 2013







### Overview

UEFI has managed to acquire a bit of a bad reputation in the open source/free software community. This presentation aims to:

- set the record straight about what problems exist out there in the UEFI ecosystem
- how they relate to the basic UEFI standard and to the codebase
- (and hopefully dispell some misunderstandings)

I have in the past year heard several things which would in the past just have been shrugged off as BIOS bugs now referred to as "UEFI secure boot bollox" on a slippery slope to ensure you will not be able to run Linux on your hardware.



In order for the rest of the presentation to be of any value, I need to start by attempting to explain how UEFI is not the evil plot by the industry to enforce device lockdown.

And even if you have already made your mind up that the very concept of binary signing is evil because it is possible to use it for device lockdown, this presentation will hopefully help clarify which bits you should focus on opposing.

First, in order of decreasing level of nefariousness, I will go through four levels of distinct concepts which all to some extent form part of what people tend to bundle together under the banner "UEFI Secure Boot" (or sloppily, just "secure boot", or even just "UEFI"):

- Microsoft logo requirements for Windows 8
- UEFI Secure Boot
- UEFI
- Shim



# Microsoft logo requirements

As part of the launch of Windows 8, Microsoft wrote down some rules about how the firmware on \_any\_ devices that ship with Windows preinstalled must operate. Part of this was that it must be able to cryptographically verify the signature of any images it loads, using the UEFI Secure Boot protocol.

For x86 devices, this document explicitly states that this signature checking mechanism must be possible to disable. For ARM devices, this document explicitly states that this signature checking mechanism must NOT be possible to disable.

This annoys me to no end, but from Microsoft's point of view, it's Windows vs. Windows RT - and RT devices will only ever run the OS shipped with it (yeah, right!).



# Logo requirements #2

The entirely obvious problems with this are exacerbated by the facts that:

- the implementation details (and shortcomings of the UEFI specification prior to 2.4) mandates only one key can be registered, meaning all OS installers must use the same key.
- Microsoft, for all intents and purposes, are their own CA for Windows installers. Hence anyone who wants to install software on anything shipped with Secure Boot enabled must have their installer signed by the same CA.



#### **UEFI Secure Boot**

UEFI Secure Boot is a standard for supporting, and enforcing, the cryptographic verification of loaded images before they can be executed. That is all.

It depends entirely on hardware, software that comes before it, and software that comes after it to actually achieve something that with a straight face could be called secure boot. So just as if you have a color blind (or obnoxious) friend with a cute red pet lizard called Green, just remember that in the context of the UEFI environment, Secure Boot is a name, not a description.

I am not actually going to dwell much on the use of UEFI Secure Boot in the rest of the presentation. That is not why we are here. (And Sledge has a presentation on that after this.)



### **UEFI**

UEFI does not mandate the use of Secure Boot. Nor does it mandate that when Secure Boot exists, there should be anything restricting the device owner from disabling it.

Hating UEFI because it is possible to mandate that it must only run signed images makes about as much sense as hating Linux because you can run software that uses DRM (Spotify, flash) on it.




### Shim

Shim is a UEFI application that also installs a UEFI protocol for use by other applications. It was written by Matthew Garret, in order to make it possible to load binaries \_not\_ signed by the primary firmware key.

A utility that just sidestepped the chain-of-trust checking would be unlikely to be signed by any serious CA, so what Shim does is simply providing a second level of authentication; a key database that can be kept in addition to the primary firmware key, and let the operator securely add/remove keys (given proper hardware implementation).

Used by commercial distro vendors in conjunction with GRUB and an out-of-tree patch providing support for using the shim protocol for loading kernel/initrd on x86.



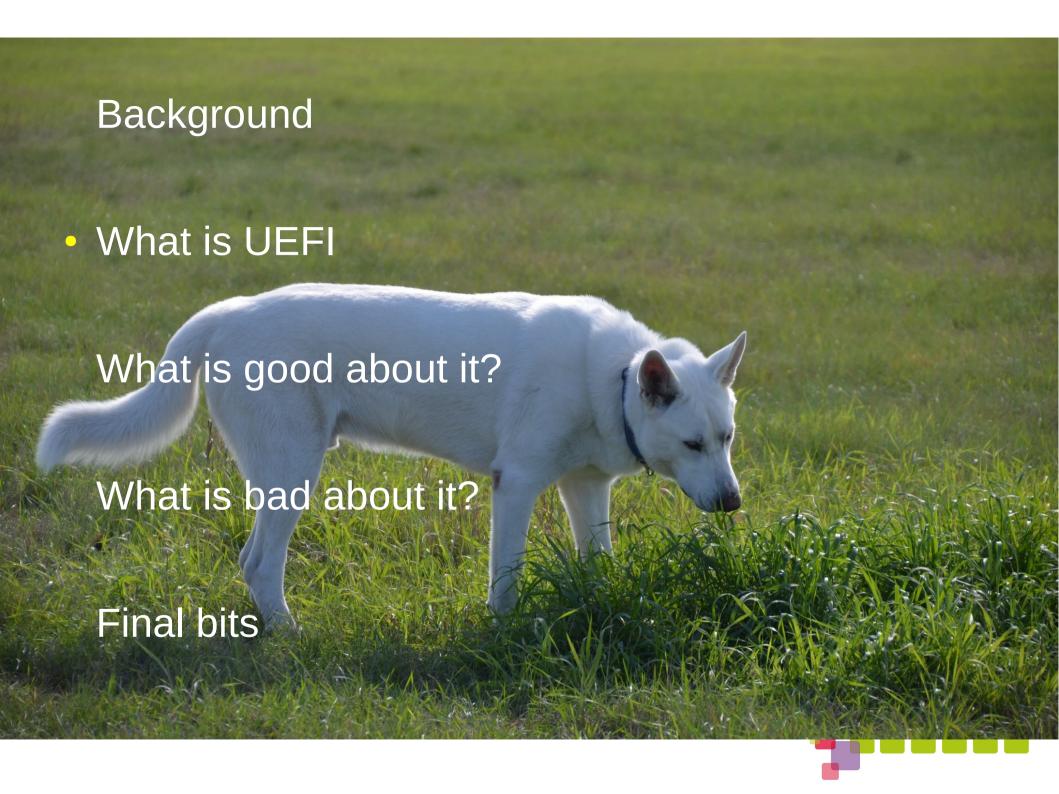

### What is UEFI?

UEFI is something almost unique in the history of mankind; it is a specification for a firmware architecture, which has gained critical mass in the (commercial) community and is already the defacto standard for x86 machines. Moreover, UEFI is only the specification - not the implementation.

The origin is EFI, the Extensible Firmware Interface developed by Intel for the IA64 architecture. Version 1.10 was handed over to the UEFI Forum as the starting point of the UEFI specification.



### Why was it needed?

It replaces BIOS: a horrible, outdated piece of crud, tied to an architecture that has not really existed for decades. A "secret sauce" piece of software reverse-engineered out of the original IBM PC and then bolted onto for as long as was possible, before it simply could no longer be extended to support more RAM, larger hard drives or fundamental changes to system boot architecture. An entirely closed world run by a very small group of companies.



### **UEFI** is all nice and shiny!

Well, no.

But at least its overall architecture is 20+ years more modern than BIOS. It was initially developed by Intel for IA64, and it is actually one of the cleanest and most useful firmware infrastructures I have come across.



### TianoCore + edk2

On releasing the specification, Intel also released the overall framework (but not the platform support code) into an open source project called TianoCore. TianoCore does its overall development in the edk2 (EFI Development Kit) tree.

It is an active project, contributed to by both hardware, BIOS and software vendors. But the "UEFI BIOS" in modern PCs is augmented with additional bits and bobs provided by the BIOS vendors.







### In general

It provides a standardised execution environment, into which any boot loader or boot time configuration utility can be installed.

This execution environment provides things like direct block access support, direct Ethernet support, console support - all portable across *any* implementation (in theory – and impressively often in practise).



# Filesystem support

- It has explicit support for GUID Partition Table (death to MBR!).
- While it mandates VFAT, Microsoft have released their VFAT driver with explicit patent grants and stuff for uses in UEFI firmware.
- Support for additional filesystems can be added by loading drivers.



### Extensible (the 'E')

Supports running applications and loading drivers and protocols.

Expansion cards can have drivers installed into the EFI system partition and loaded automatically on boot.

Versioned APIs.

Even supports architecture independent applications/drivers via EBC (EFI Byte Code).



### Runtime Services

While somewhat horriffic from a system design point of view (my description is that it is somewhat like bits of UEFI hanging around post boot to act as a shared library for the kernel), it provides an unparallelled level of integration between operating system and firmware.

Lets the operating system set environment variables, including boot images and priority order of those – in Linux using *efibootmgr*, which simply operates on /sys files.

"Capsules" provides a standardised interface from within the operating system to do things like scheduling a firmware update on next reboot.

Standardised interface for system reboot/poweroff.



### Secure Boot

No, seriously.

Where the device owner is in control of this mechanism (and the adjacent hardware and software are doing the right thing), this can be a quite useful security feature.



# It has a written specification

This may not seem to be very much, but it is huge.

### It has a conformance test suite

This may not seem to be very much, but it is huge.




### Critical mass

Known to work over at least 4 different architectures.

Handy if you want to slot seamlessly into the existing <whatever is cool this week>scale server exosystem.



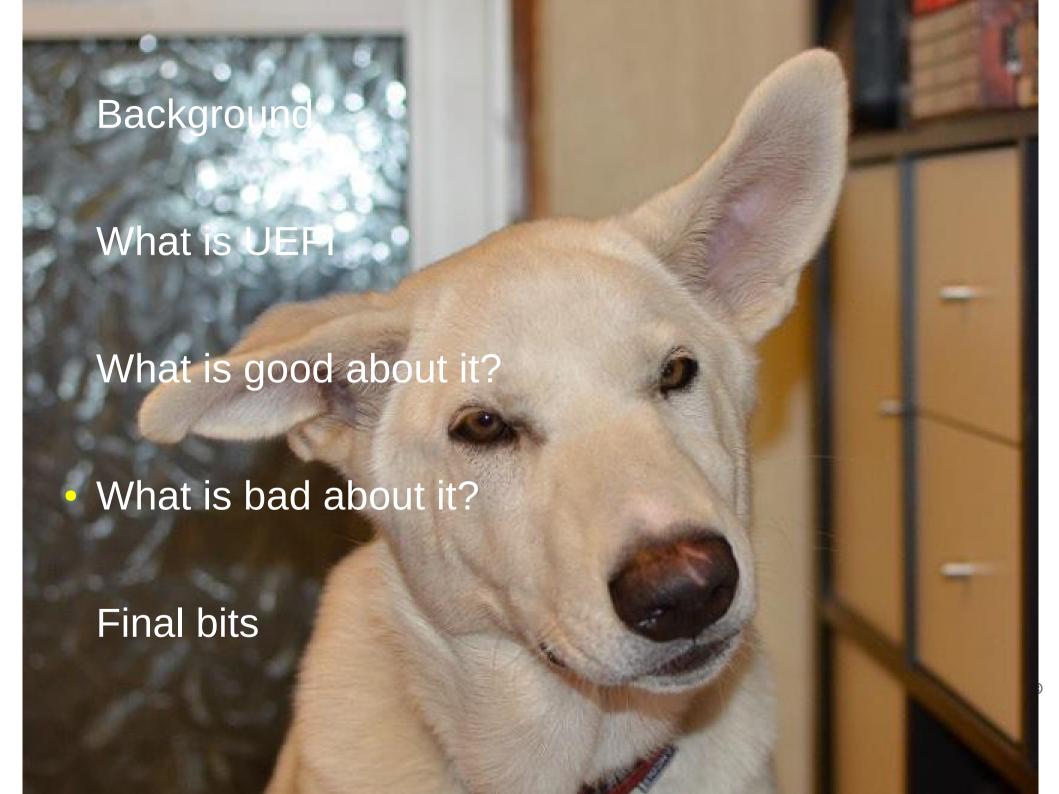

### Source code

Well, UEFI does not exactly come entirely without legacy:

- drivers and executables are PE/COFF format (!)
- APISpecificationSyntaxIsUngodlyNeverendingCamelCase().
  - And coding style is Windows^M
- Repository is svn, but there are official git mirrors.
  - Of course, mixing git and svn has its own problems.
- UCS-2
- Test suite has historically only been available to licensees (and they have only received it as a .zip file drop). But work now underway to move it to a repository, and there are at least discussions about opensourcing it.


```
//
// Define the maximum extended data size that is supported when a status code is reported.
#define MAX EXTENDED DATA SIZE 0x200
EFI STATUS CODE PROTOCOL *mReportStatusCodeLibStatusCodeProtocol = NULL;
EFI EVENT
                     mReportStatusCodeLibVirtualAddressChangeEvent;
EFI EVENT
                     mReportStatusCodeLibExitBootServicesEvent;
BOOLEAN
                     mHaveExitedBootServices = FALSE;
 Locate the report status code service.
 Retrieve ReportStatusCode() API of Report Status Code Protocol.
**/
VOID
InternalGetReportStatusCode (
 VOID
 EFI STATUS Status;
 if (mReportStatusCodeLibStatusCodeProtocol != NULL) {
  return;
 if (mHaveExitedBootServices) {
  return;
 // Check gBS just in case ReportStatusCode is called before gBS is initialized.
 if (gBS != NULL && gBS->LocateProtocol != NULL) {
  Status = gBS->LocateProtocol (&gEfiStatusCodeRuntimeProtocolGuid, NULL, (VOID**) &mReportStatusCodeLibStatusCodeProtocol);
  if (EFI_ERROR (Status)) {
   mReportStatusCodeLibStatusCodeProtocol = NULL;
```



### Tianocore edk2

- Contains no\* platform support
  - BSD licensed, and partly due to this, partly due to historic ecosystem, very low availability of device drivers.



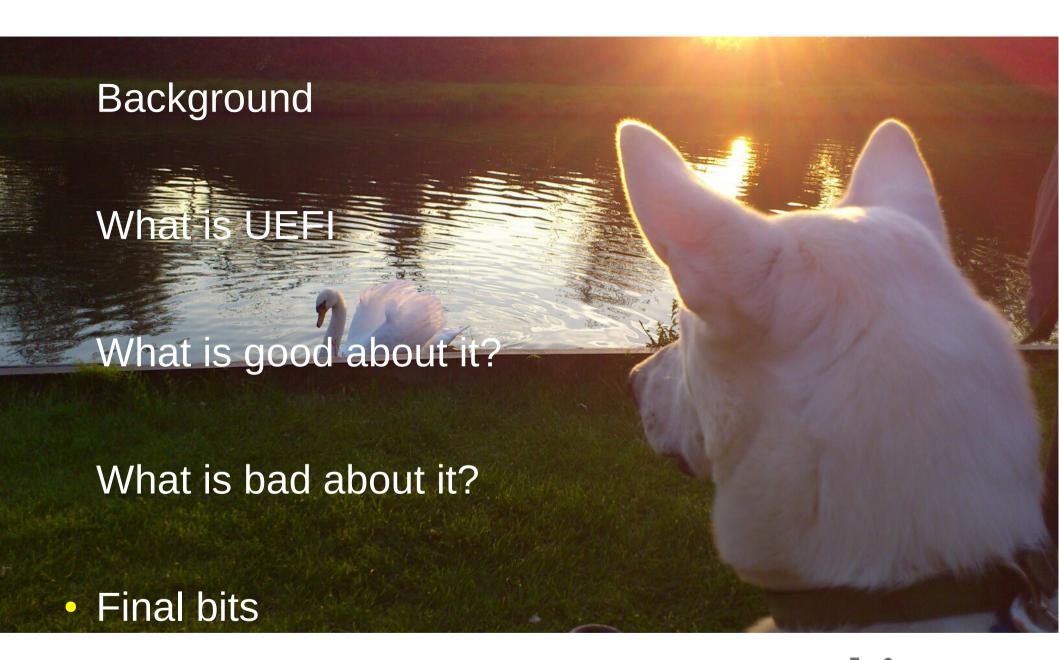



### Linaro

Linaro maintains a tree of edk2 with added support for a few platforms.

https://git.linaro.org/gitweb?p=arm/uefi/uefi.git

Member landing teams keep "their" platforms from bitrotting.

We also do various bits of peripheral (ARM) development – GRUB, Linux UEFI runtime services support, kernel UEFI stub support, ACPI support.



#### **ACPI**

As of a couple of weeks ago, the UEFI Forum is now the owner of the ACPI specification.

The previous world was that for each Windows release, the ACPI group would get together and discuss, release a new spec, and then go into hiatus until the next time.



#### Resources

- Build/run UEFI for Aarch64
  - http://sourceforge.net/apps/mediawiki/tianocore/index.php?title=ArmPlatformPkg/AArch64
  - (search for 'sourceforge aarch64 uefi')

- UEFI Forum
  - http://www.uefi.org/
  - Whitepaper: UEFI Secure Boot in Modern Computer Security Solutions

